

Produto tratado e com película impermeabilizante

SOMABUS

The **SOMABUS** panel is a marine plywood (WBP phenolic glue) produced with natural resources, wood from forest management and/or reforestation.

Treated multilaminated plywood coated with waterproofing film application suitable for the transport industry.

SOMAPAR
Plantando o Futuro

INDICATED FOR FLOORS, COVERINGS AND FLOORS FOR BUSES, MOTORHOMES, NAUTICAL, AMONG OTHERS. BASES FOR ROLL-UP DOORS.

SOMABUS

CUSTOM MEASURES ACCORDING TO THE CUSTOMER'S NEEDS.
MAXIMUM WIDTH 2500MM AND MAXIMUM LENGTH 9000MM.

STANDART MEASURES

Length (mm)	Width (mm)	THICKNESSES
2500 - 2440	1220	12,14 e 18
2500	1600	

* Other measurements and thicknesses on request

TOLERANCE TABLE ACCORDING TO NBR 1954

THICKNESS/quantity of sheets	THICKNESS VARIATION	SQUARE	DIMENSIONAL
12MM - 7L	+/- 0,8mm	+/- 2,0mm	+/- 2,0mm
14MM - 7L	+/- 1,0mm	+/- 2,0mm	+/- 2,0mm
18 MM - 9L	+/- 1,0mm	+/- 2,0mm	+/- 2,0mm

PRODUCT COMPOSITION

GLUE

Meets the bond strength requirements as set out in the EN 314 standard. The wood veneers are bonded with WBP phenolic resin, 100% waterproof.

CARB CERTIFIED PRODUCT 2. LOW FORMOLDEHYDE EMISSION

EDGES


The edges of SOMA BUS are sealed with ink to prevent/delay the absorption of moisture, ensure a perfect seal, delaying the phenomenon of swelling and contraction. **NBR 9486**

FACE NA BACK

Coming from forest management or reforestation areas.

TREATMENT

Treatment against wood biodegradation: performed in an autoclave plant with retention of active ingredients greater than 6.5 kg/m³. The preservative used is CCA with 72% of the active ingredients.

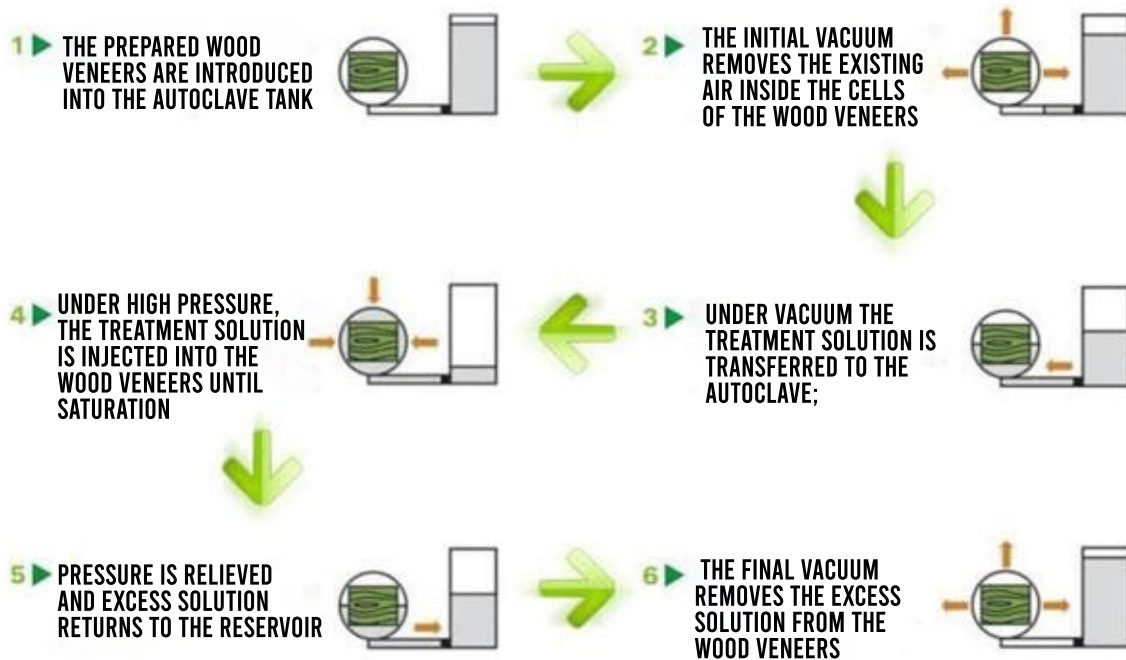

SURFACE FINISH	COATING	HUE
Calibrated/SANDED	Plasticized with 120gr phenolic film. Both sides coated	Dark brown

MACHINING AND MECHANIZATION

It is possible, on request, to make holes, cutouts, rounding of the tops. Lowering, tongue-and-groove (T&G), joint with BizeL, among others.

ADVANTAGES AND BENEFITS



ELIMINATES THE KNEADING AND SANDING PROCESS. REDUCING MATERIAL AND PROCESS COSTS.



REDUCES SURFACE ABSORPTION. IT CAN BE WASHED DAILY. PREVENTS INCRUSTATIONS, FACILITATES CLEANING.



NO NEED TO PAINT.



ELIMINATES IMPERFECTIONS IN THE PLATE.



MATERIAL WITHOUT POROSITY. IT MAKES BONDING THE FLOOR SURFASSE EASIER.



IMPROVES THE VISUAL FINISH OF THE ROAD BUS LUGGAGE COMPARTMENT.

GUARANTEES

The Somapar plywood panel is guaranteed for one year (12 months) against production defects, as long as the instructions for use are followed. See the technical proposal.

TRACEABILITY

Through the production batch number and or the manufacturing date, it is possible to trace all production processes, the origin of inputs and raw materials that make up the product.

PACKAGING, TRANSPORTATION AND STORAGE

Pieces packed in a palatized way and belted with polyester ribbons.



CONTACT US

www.somapar.com.br

Rod. BR 476 Km 363,40 nº 1238 - Bairro São Joaquim
União da Vitória-PR, Brasil | CEP 84.605-250

contato@somapar.com.br

+55 (42) 3521-2900 | +55 (42) 9 9990-0206

/SOMAPAR

[somapar_mad](#)

